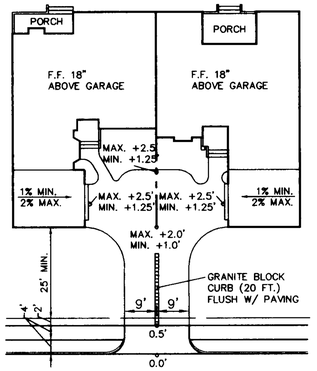

TYPICAL GRADING – CARRIAGE HOMES

SCALE: 1"=20'

STORM SEWER SCHEDULE

1. DI-1, TOP=122.50, H=2.95'
2. 92 LF OF 18" CLASS III CONCRETE PIPE @ 1.40%, INV. IN=119.55, INV. OUT=118.26
3. MH-1, TOP=124.00, H=5.79' W/ ST-1 STEPS
4. 136 LF OF 18" CL III CONCRETE PIPE @ 1.40%, INV. IN=118.21, INV. OUT=116.31
5. MODIFIED DI-3B, BASE ONLY W/ ST-1 STEPS
6. 88 LF OF 15" CLASS III CONCRETE PIPE @ 5.00%, INV. IN=121.00, INV. OUT=116.10
7. DI-3C, L= 6', H=6.21', TOP=122.47 W/ ST-1 STEPS
8. 34 LF OF 19"X30" ELLIPTICAL PIPE @ 0.50%, INV. IN=116.26, INV. OUT=116.10
10. DI-3B, L=8', H=6.22', TOP=123.44 W/ ST-1 STEPS
11. 34 LF OF 15" CLASS III CONCRETE PIPE @ 0.50%, INV. IN=117.22, INV. OUT=117.05
12. DI-3B, L=10', H=6.44', TOP=123.44 W/ ST-1 STEPS
13. 182 LF OF 18" CLASS III CONCRETE PIPE @ 0.50%, INV. IN=117.00, INV. OUT=116.10
14. DI-3C, L=6', H=6.43', TOP=122.47 W/ ST-1 STEPS
15. 176 LF OF 30" CLASS III CONCRETE PIPE @ 0.50%, INV. IN=116.04, INV. OUT=115.16
16. DI-3B, L=6', H=11.55', TOP=126.66 W/ ST-1 STEPS
17. 124 LF OF 30" CLASS III CONCRETE PIPE @ 0.50%, INV. IN=115.10, INV. OUT=114.48
18. DI-1, H=8.06', TOP=121.50 W/ ST-1 STEPS
19. 220 LF OF 30" CLASS III CONCRETE PIPE @ 0.50%, INV. IN=114.43, INV. OUT=113.33
20. DI-1, TOP=128.00, H=2.50'
21. 120 LF OF 15" CLASS III CONCRETE PIPE @ 1.82%, INV. IN=125.50, INV. OUT=123.32
22. DI-3C, L=10', H=3.90', TOP=126.57
23. 34 LF OF DUAL 15" CL III CONC. PIPE @ 0.50%, INV. IN=123.27, INV. OUT=122.90
24. DI-3C, L=10', H=4.12', TOP=126.57 W/ ST-1 STEPS
25. 116 LF OF 24" CLASS III CONCRETE PIPE @ 0.84%, INV. IN=122.85, INV. OUT=121.87
26. 50 LF OF DUAL 36" CLASS III CONCRETE PIPE @ 2.0%, INV. IN=119.00, INV. OUT=118.00, W/ EW-6
27. 112 LF OF 18" CLASS III CONCRETE PIPE @ 5.76%, INV. IN=122.50, INV. OUT=116.05
28. DI-3C, L=6', H=5.40', TOP=121.40 W/ ST-1 STEPS
29. 44 LF OF 30" CLASS III CONCRETE PIPE @ 0.50%, INV. IN=116.00, INV. OUT=115.78
30. DI-3C, L=6', H=5.67', TOP=121.40 W/ ST-1 STEPS
31. 100 LF OF 30" CLASS III CONCRETE PIPE @ 1.23%, INV. IN=115.73, INV. OUT=114.50
32. 8 LF OF DUAL 60" CMP @ 0.50%, INV. IN=114.78, INV. OUT=114.74, W/ EW-7

NOTE: A "W" AND "S" SHALL BE STAMPED ON THE CURB WHILE THE CONCRETE IS STILL WET. THESE MARKS SHALL INDICATE THE ACTUAL LOCATION OF THE WATER AND SEWER CONNECTIONS FOR EACH LOT.

GRAPHIC SCALE

30 0 15 30 60 120

(IN FEET)
1 inch = 30 ft.

THIS DRAWING PREPARED AT THE PRINCE GEORGE COUNTY OFFICE

COMMONWEALTH OF VIRGINIA
DERRICK A. JOHNSON
No. 24761
PROFESSIONAL ENGINEER

CORPORATE OFFICE:
711 N. COURTHOUSE ROAD
RICHMOND, VA. 23236–4099
Telephone: 804–794–9463
Fax: 804–794–7639
Web Site: www.timmons.com

OTHER BRANCH OFFICES:
Henrico County, VA • 804–262–7398
Hanover County, VA • 804–559–4520
Chesterfield County, VA • 804–560–1000
Fredericksburg, VA • 540–891–4105
Lynchburg, VA • 434–846–0411

PRINCE GEORGE COUNTY OFFICE
4411 CROSSINGS BOULEVARD
PRINCE GEORGE, VA 23875–1455
Telephone: 804–733–1455
Fax: 804–751–0798
e–mail: timmons3@timmons.com

REVISION DESCRIPTION	DATE
COUNTY COMMENTS	3–2–2000
VDOT, DEPT. OF CONSERVATION AND RECREATION COMMENTS	4–11–2000

ENGINEERS * SURVEYORS * PLANNERS * LANDSCAPE ARCHITECTS * ENVIRONMENTAL SCIENTISTS * GEOGRAPHIC INFORMATION SYSTEMS CONSULTANTS * CONSTRUCTION MANAGERS

TIMMONS

TINSLEY CHARTER – SECTION ONE

BLAND DISTRICT • PRINCE GEORGE COUNTY • VIRGINIA

PLAN SHEET

DATE	1–14–00
DRAWN BY	S. BROOKS
DESIGNED BY	D. JOHNSON
CHECKED BY	D. JOHNSON
SCALE	1" = 30'

FINAL

JOB NO. 18902

SHEET NO. 4

These plans and associated documents are the exclusive property of TIMMONS and may not be reproduced in whole or in part and shall not be used for any purpose whatsoever, inclusive, but not limited to construction, bidding, and/or construction staking without the express written consent of TIMMONS.

K:\DRAW\18902-TinsleyCharter\TNSLY-4.dwg Tue Apr 11 13:28:16 2000 SRB, TRI-CITIES OFFICE